



PROVIA LLC
1550 County Road 140
Sugarcreek, Ohio 44681
(877) 389-0834
www.provia.com

PROVIA MANUFACTURED STONE

CSI Sections:

- 04 71 00 Manufactured Brick Masonry**
- 04 73 00 Manufactured Stone Masonry**

1.0 RECOGNITION

ProVia Manufactured Stone has been evaluated for use as a wall covering over exterior walls of wood studs, cold-formed steel framing, or concrete masonry. The composition, strength, durability, and thermal resistance of the ProVia Manufactured Stone was evaluated for compliance with the following codes:

- 2024, 2021, 2018, and 2015 International Building Code® (IBC)
- 2024, 2021, 2018, and 2015, International Residential Code® (IRC)
- 2023 Florida Building Code, Building (FBC) - attached Supplement
- 2023 Florida Building Code, Residential (FRC) - attached Supplement

2.0 LIMITATIONS

Use of ProVia Manufactured Stone as recognized in this report is subject to the following limitations:

2.1 “Expansion or control joints used to limit the effect of differential movement of adhered manufactured stone masonry veneer (AMSMV) supports must be specified by the architect, designer, or veneer manufacturer, in that order. Consideration must be given to movement caused by temperature changes, shrinkage, creep, and deflection.” [AC51]

2.2 “For installation in accordance with the 2021, 2018 and 2015 IBC, supporting wall construction must be designed to support the weight of the veneer system. Horizontal framing members, such as lintels and headers, which support precast stone veneer, must be designed to limit deflection to $\frac{1}{600}$ of the span.” [AC51]

2.3 “In jurisdictions adopting the IRC, where the seismic provisions of Section R301.2.2 apply, the average weight of the wall supporting the AMSMV, including the weight of the veneer system, must be determined. When this weight

exceeds the applicable limits of IRC Section 301.2.2.2, an engineered design of the wall construction must be performed in accordance with IRC Section R301.1.3.” [AC51]

2.4 When installed in accordance with the 2024 IBC, the special inspection requirements are as referenced in Table 4 of TMS 602 as required in Section 1705.4.

2.5 When installed in accordance with the 2024 IBC, differential movement shall be addressed in accordance with Section 13.1 of TMS 402-22. Deflection of members supporting the AMSMV shall meet the requirements of Section 13.1.2.3 of TSM 402-22. Walls covered in AMSMV, shall comply with the out-of-plane deflection criteria as defined in Section 13.3.1.2 of TMS 402-22.

2.6 Provia Manufactured Stone recognized in this report is produced by Provia LLC, in Sugarcreek, Ohio.

3.0 PRODUCT USE

3.1 ProVia Manufactured Stone complies with Section 1404.11 of the 2024 IBC, Section 1404.10 of the 2021 and 2018 IBC, and Section 1405.10 of the 2015 IBC and Section R703.7 of the IRC as an exterior wall covering.

The backing for ProVia Manufactured Stone “adhered veneer shall be of concrete, masonry, steel framing, or wood framing.” [Section 1403.4 of the 2024, 2021, and 2018 IBC, Section 1404.4 of the 2015 IBC] The veneer units shall be adhered to cement plaster, concrete, or concrete masonry backings when installed in accordance with the manufacturer’s specified installation instructions, ASTM C1780, this report, and the applicable code. Lath, lath accessories, and fasteners shall be corrosion-resistant. The installation instructions shall be strictly adhered to and be available at the jobsite during application.

3.2 ProVia Manufactured Stone shall be installed in accordance with Section 1404.11.1 of the 2024 IBC, Section 1404.10.1 of the 2021 and 2018 IBC, and Section 1405.10.1 of the 2015 IBC or Section R703.12 of the IRC, as applicable, ASTM C1780, and the installation instructions. In the event of a conflict, the more restrictive requirement governs.

3.3 ProVia Manufactured Stone units may be applied over the assemblies described in [Table 1](#) of this report when installed in accordance with the referenced code sections and this report.

4.0 PRODUCT DESCRIPTION

4.1 ProVia Manufactured Stone is manufactured concrete products formed to resemble natural stone in both texture and color. The individual masonry veneer units shall be a

The product described in this Uniform Evaluation Service (UES) Report has been evaluated as an alternative material, design or method of construction in order to satisfy and comply with the intent of the provision of the code, as noted in this report, and for at least equivalence to that prescribed in the code in quality, strength, effectiveness, fire resistance, durability and safety, in accordance with Section 104.2.3 of the 2024 IBC and Section 104.11 of previous editions. This document shall only be reproduced in its entirety.






minimum of 3/4-inch (19 mm) thick and a maximum of 2 1/2-inches (63.5 mm) thick with a minimum compressive strength of 1,800 psi (12.4 MPa). The installed products “average saturated weight does not exceed 15 pounds per square foot. The weight of the mortar setting bed and scratch coat are outside the scope of this report” [AC51]. The recognized veneer styles are shown in [Table 2](#) of this report.

4.2 The veneer, at thickness of 1 inch (25.4 mm), has an average thermal resistance (R-value) of 0.58 h. ft² °F/Btu when tested in accordance with ASTM C518.

5.0 IDENTIFICATION

Boxes of ProVia Manufactured Stone are identified with the manufacturer’s name, the pattern/style name, manufacturing date, manufacturing location, and evaluation report number (ER-462). Either IAPMO UES Mark of Conformity may also be used as shown below:

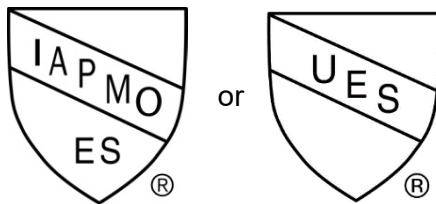

IAPMO UES ER-462

6.0 SUBSTANTIATING DATA

6.1 Data in accordance with ASTM C1670, and the Acceptance Criteria for Precast Stone Veneer (ICC-ES AC51), approved June 2018, editorially revised February 2024.

6.2 Reports of Thermal Transmission Properties testing in accordance with ASTM C518.

6.3 Test reports are from laboratories in compliance with ISO/IEC 17025.

6.4 Manufacturer’s descriptive literature and installation instructions.

7.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research completed by IAPMO Uniform Evaluation Service on ProVia Manufactured Stone to assess its conformance to the codes and standards shown in Section 1.0 of this report and documents the product’s certification. Products are manufactured at locations noted in Section 2.6 of this report under a quality control program with periodic inspections under the supervision of IAPMO UES.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org



TABLE 1 – Application of Masonry Veneer Units

Item	Code Section	Notes
1. Mortar Scratch Coat	2024 IBC Section 1404.11.1.4.2, 2021 and 2018 IBC Section 1404.10, 2015 IBC Section 1405.10.1 IRC Section R703.7.2	Minimum ³ / ₈ inch (9.5 mm) thick, maximum of ⁵ / ₈ inch (15.9 mm) thick scratch coat of Type S or N mortar complying with ASTM C270, scored horizontally in accordance with IBC Section 2512.6.
2. Water Resistive Barrier	2024 IBC Section 1404.11.1.1, 2021 and 2018 IBC Section 1404.10.1.1, 2015 IBC Section 1405.10.1.1 IRC Section R703.7.3	
3. Flashing	2024, 2021, and 2018 IBC Section 1404.4, 2015 IBC Section 1405.4 and Section 1405.10.1.2 IRC Section R703.4 and IRC Section R703.12.2	
4. Weep Screed	2024 IBC Section 1404.11.1.2, 2021 and 2018 IBC Section 1404.10.1.2, 2015 IBC Section 1405.10.1.2 IRC Section R703.12.1 TMS 402-22 Section 13.3 TMS 402-16 and TMS 402-13 Section 12.1.6.2	
5. Lath and Fasteners	IBC Section 2510.3 (ASTM C926 and ASTM C1063) IRC Section R703.6.1	For proprietary fasteners, shear and pull out capacities shall be justified to the satisfaction of the authority having jurisdiction (AHJ).
6. Over Wood Based or Gypsum Sheathing Supported by Steel or Wood Framing	As given in Items 1, 2, 3, 4, and 5 and Notes	Items 1, 2, 3, 4, and 5 with framing spaced at 16 inches on-center maximum, lath shall be 2.5 lb/yd ² self-furring diamond metal lath complying with ASTM C847 fastened in accordance with the requirements of ASTM C1063 Section 7.10.2, and Section R703.6.1 of the IRC with fasteners spaced a maximum of 6 inches on-center.
7. Over Open Studs	As given in Items 1, 2, 3, 4, 5, and 6 and Notes	Items 1, 2, 3, 4, 5, and 6 except with 2.5 lb/yd ² galvanized expanded diamond mesh metal lath complying with ASTM C847.
8. Over concrete or concrete masonry	Prepare surfaces in accordance with IBC Section 2510.7 and Section 5.2 of ASTM C926.	The veneer may be adhered to backings of clean concrete masonry without lath, in accordance with Section 2510.7 of the IBC and Section 5.2 of the ASTM C926. Or Items 1, 3, 4, and 5 except with metal lath complying with ASTM C847; or 1.4 lb/yd ² woven wire plaster base complying with ASTM C1032.
9. Application of Veneer Units	2024, 2021, and 2018 IBC Section 2103.2.4, 2015 IBC Section 2103.9	Nominal ½-inch thick setting bed of Type S or N mortar applied to the back of the veneer units in accordance with instructions as noted in Section 3.2 of this report.

SI conversions: 1 inch = 25.4 mm, 1 lb/yd² = 0.54 kg/m²

TABLE 2 – Recognized Veneer Style Names

Dry Stack, Fieldstone, LedgeStone, Limestone, Natural Cut™, PrecisionFit™, River Rock, Terra Cut™, Chisel Cut™, Ridge Cut™, Edge Cut™



FLORIDA SUPPLEMENT

PROVIA LLC
1550 County Road 140
Sugarcreek, Ohio 44681
(877) 389-0834
www.provia.com

PROVIA MANUFACTURED STONE

CSI Sections:

- 04 71 00 Manufactured Brick Masonry**
- 04 73 00 Manufactured Stone Masonry**

1.0 RECOGNITION

ProVia Manufactured Stone evaluated in IAPMO UES ER-462 is a satisfactory alternative exterior wall covering in accordance with the following codes and regulations:

- 2023 Florida Building Code, Building (FBC, Building)
- 2023 Florida Building Code, Residential (FBC, Residential)

2.0 LIMITATIONS

The ProVia Manufactured Stone described in IAPMO UES ER-462 complies with or is suitable alternatives to what is specified in the codes listed in Section 1.0 of this supplement, subject to the following limitations:

2.1 Installation of ProVia Manufactured Stone shall provide for a clear inspection space in accordance with FBC, Building Sections 1403.8, 2114.2, and 2603.8 or FBC, Residential Section R318.4, as applicable; except, where the masonry veneer extends below grade, a termite protective treatment shall be applied in accordance with FBC, Building Section 2114.2.

2.2 Use of ProVia Manufactured Stone in Florida High-Velocity Hurricane Zones (HVHZ) is beyond the scope of this report.

2.3 Verification that the report holder’s quality assurance program is audited by a quality assurance entity, approved by the Florida Building Commission (or the building official when the report holder does not possess an approval by the Commission), to provide oversight and determine that the products are being manufactured as described in this evaluation report to establish continual product performance shall be provided for products falling under Section (5)(d) of Florida Rule 61G20-3.008.

2.4 This supplement expires concurrently with ER-462.

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org